



1Touch

Fingerprint Door Lock

Installation Instructions:

Disassembly:

- Using the tool represented in figure 1, remove the nut highlighted in figure 2.
- Slide the Back Body Cover, highlighted in figure 3, off of the Back Body of the 1Touch lock.
- Remove the 2 screws, highlighted in figure 4, to separate the Front and Back Lock Bodies.

Assembly:

- Replace existing latch with the latch provided with the 1Touch
- Using the supplied rubber grommets, align the lock Front and Back Bodies into position. Be sure to pass the power cable through the door hole and also through the hole in the Back Body (above and right of the top screw in figure 4).
- With the Front and Back Bodies in position, replace the 2 screws highlighted in figure 4.
- Replace the Back Body Cover highlighted in figure 3
- Replace the nut highlighted in figure 2




Figure 1

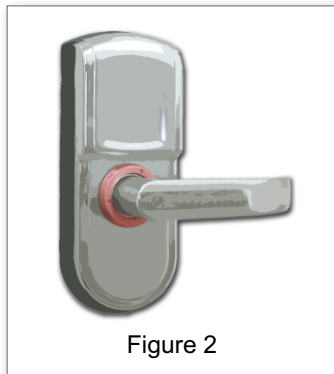


Figure 2

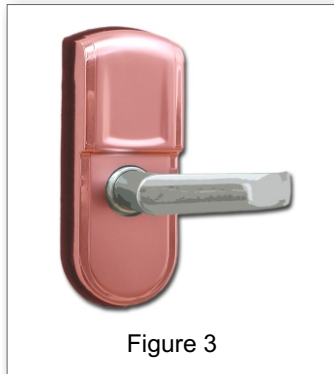


Figure 3




Figure 4